



PP VIKEN AS

Lifting gear

By Marius Mehus

+47 906 12 345

Sales@ppviken.no

Florvågøen 215 -
5305 Florvåg



Slings



Protected eyeslings



Eyeslings



Heavy lift slings



Fireproof slings with or without eye



Lifting straps



Lifting straps



Lifting straps



Lifting straps




Lifting straps



Lifting straps




Lifting straps

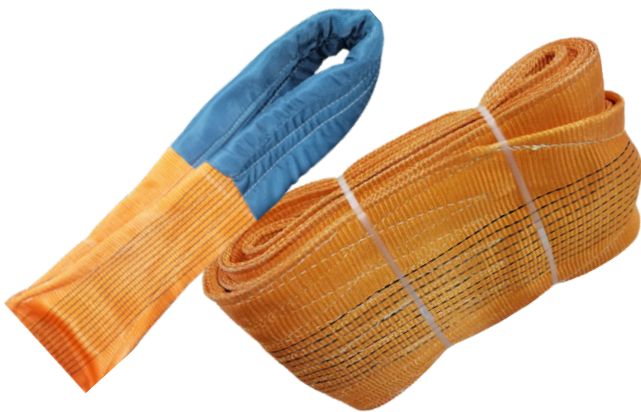

Lifting straps




Heavy lift straps

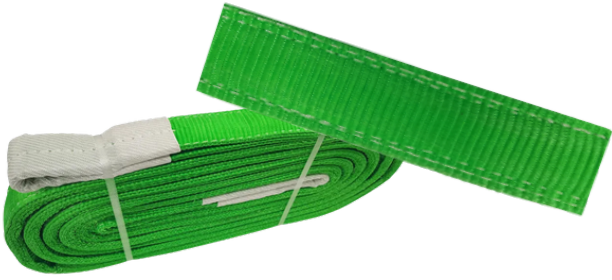

Heavylift straps



Heavylift straps

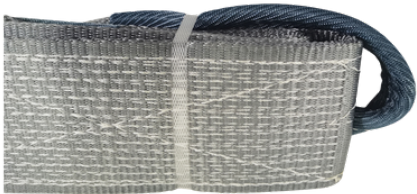

Heavylift straps



Heavylift straps




Heavylift straps




Heavylift straps




Endless webbing strap

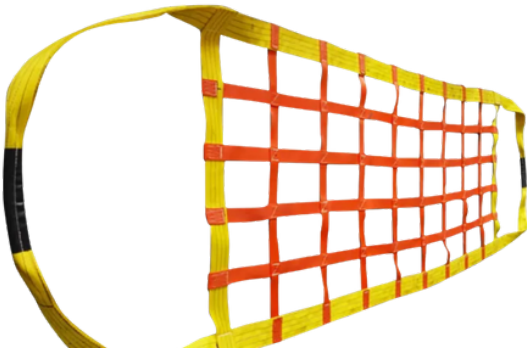

Safetynet

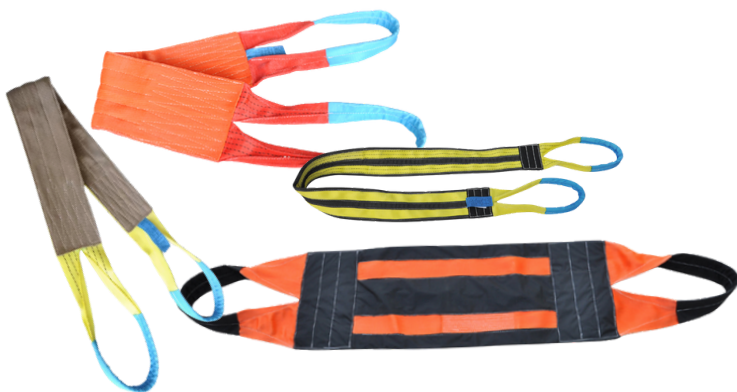

Wide specialstraps

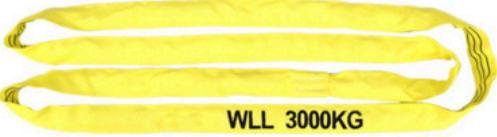Type	Art. No	Working Load Limit (kg)	Approx Thickness (mm)	Approx Width (mm)	Minimum Length L(m)
Type R01(Endless type)					
	R01-01	1000	6	40	0.5
	R01-02	2000	7	50	0.5
	R01-03	3000	8	60	0.5
	R01-04	4000	9	70	0.5
	R01-05	5000	11	75	0.5
	R01-06	6000	12	80	1.0
	R01-08	8000	13	90	1.0

	R01-10	10000	15	100	2.0
	R01-12	12000	16	110	2.0
	R01-15	15000	18	125	2.0
	R01-20	20000	20	150	2.5
	R01-25	25000	24	180	2.5
	R01-30	30000	32	200	2.5

	R01-40	40000	40	200	2.5
	R01-50	50000	45	220	2.5
	R01-60	60000	65	240	4.0
	R01-80	80000	70	260	4.0
	R01-100	100000	80	290	4.0
	R01-200	200000	120	450	5.0
	R01-300	300000	160	525	5.0

Type	Art. No	Working Load Limit (kg)	Approx. Thickness (mm)	Approx. Width (mm)	Minimum Length L(m)
Type R03(Eye type)					
	R03-01	1000	11	50	1.0
	R03-02	2000	12	60	1.5
	R03-03	3000	14	70	1.5
	R03-04	4000	15	80	1.5
	R03-05	5000	23	90	1.5
	R03-06	6000	25	90	2.0
	R03-08	8000	26	100	3.0
	R03-10	10000	27	110	3.0
	R03-12	12000	28	125	3.0
	R03-15	15000	29	150	3.0

Type	Art. No	Working Load Limit (kg)	Approx Width (mm)		Minimum Length L (m)	Eye Length (mm)
Type W01 (Eye type Webbing Sling)			5、6:1	7:1		
	W01-01	1000	25	30	1.1	350
	W01-02	2000	50	60	1.2	400
	W01-03	3000	75	90	1.3	450
	W01-04	4000	100	120	1.4	500
	W01-05	5000	125	150	2.0	550
	W01-06	6000	150	180	2.0	600
	W01-08	8000	200	240	2.0	700
	W01-10	10000	250	300	3.0	800
	W01-12	12000	300	300	3.0	900

Note: 5:1 & 6:1 & 7:1 safety factor are available.

Type	Art. No	Working Load Limit (kg)	Approx. Thickness (mm)	Approx. Width (mm)	Minimum Length L (m)
Type RH02 (High tensile eye type)					
	RH02-01	1000	12	24	1.5
	RH02-02	2000	18	26	1.5
	RH02-03	3000	22	35	1.5
	RH02-04	4000	25	45	1.5
	RH02-05	5000	30	50	1.5
	RH02-06	6000	32	55	2.0

	RH02-08	8000	35	65	2.0
	RH02-10	10000	38	70	3.0
	RH02-12	12000	40	75	3.0
	RH02-15	15000	45	80	4.0
	RH02-20	20000	45	95	4.0
	RH02-25	25000	48	110	4.0

Type	Art. No	Working Load Limit (kg)	Approx. Thickness (mm)	Approx. Width (mm)	Minimum Length L (m)
Type RK02 (Fireproof eye type)					
	RK02-01	1000	10	40	1.5
	RK02-02	2000	11	50	1.5
	RK02-03	3000	12	60	1.5
	RK02-04	4000	14	70	1.5

Type	Art. No	Working Load Limit (kg)	Approx Width (mm)		Minimum Length L (m)	Eye Length (mm)
Type W02 (Heavy eye type Webbing Sling)			5、 6:1	7:1		
	W02-02	2000	25	30	1.5	350
	W02-04	4000	50	60	1.5	400
	W02-06	6000	75	90	1.5	450
	W02-08	8000	100	120	2.0	500
	W02-10	10000	125	150	2.0	550
	W02-12	12000	150	180	3.0	600
	W02-16	16000	200	240	3.0	700
	W02-20	20000	250	300	3.0	800
	W02-24	24000	300	300	3.0	900
Note: 5:1 & 6:1 & 7:1 safety factor are available.						


Type	Art. No	Working Load Limit (kg)	Approx Width (mm)		Minimum Length L (m)
Type W03 (Endless type Webbing Sling)			4、 5、 6:1	7:1	
	W03-01	1000	25	30	0.5
	W03-02	2000	50	60	1.0
	W03-03	3000	75	90	1.0
	W03-04	4000	100	120	1.5
	W03-05	5000	125	150	1.5
	W03-06	6000	150	180	1.5
	W03-08	8000	200	240	2.0
	W03-10	10000	250	300	2.0
	W03-12	12000	300	300	2.0



Australian ratchet strap



European ratchet strap

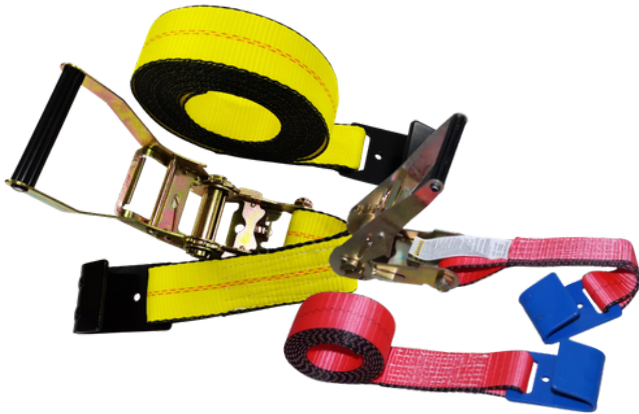

Ratchet strap with flat-hook



Ratchet strap with S-hook

LS01 Type	Art. No	Breaking Load (kg)	Width (mm)	Total Length (m)
	LS01-008	800	25	6~12
	LS01-015	1500	25	6~12
	LS01-02	2000	35/50	6~12
	LS01-03	3000	35/50	6~12
	LS01-04	4000	50	6~12
	LS01-05	5000	50	6~12
	LS01-08	8000	75	6~12
	LS01-10	10000	100	6~12

LS03 Type	Art. No	Breaking Load (kg)	Width (mm)	Total Length (m)
	LS03-0025	250	25	6~12
	LS03-003	300	25	6~12

LS05 Type	Art. No	Breaking Load (kg)	Width (mm)	Total Length (m)
	LS05-045	10000	2"	6~12
	LS05-075	16500	4"	6~12